

FVR 1000/950 4X2
FVD 1000/950 4X2



WEIGHT RATINGS*

GVM 16,500 / 12,000 kg
GCM 20,000 / 15,500 kg

ENGINE

POWER 221 kW @ 2,400 rpm
TORQUE 981 Nm @ 1,450 rpm


TRANSMISSION

9 speed manual transmission (MT)
 6 speed automatic transmission (AT)

* Refer to back page for detailed weight rating information

ENGINE	
DESCRIPTION	Isuzu 6HK1-TCS
TYPE	6 cylinder 24 valve SOHC
DISPLACEMENT	7,790 cc
COMPRESSION RATIO	17.5:1
BORE X STROKE	115 mm x 125 mm
POWER	221kW (300PS) @ 2,400 RPM (DIN NET)
TORQUE	981 Nm @ 1,450 RPM (DIN NET)
INDUCTION	Electronically controlled variable nozzle turbocharger with air-to air intercooler.
FUEL INJECTION	Direct injection high pressure common rail system.
EMISSION CONTROL	Cooled EGR with exhaust Diesel Particulate Diffuser (DPD). ADR 80/03 (Euro V / EEV) compliant.

INTELLIGENT SAFETY		
ACTIVE SAFETY	Electronic Stability Control	(ESC)
	Anti Lock Braking System	(ABS)
	Anti Skid Regulator	(ASR)
	Electronic Braking System	(EBS)
	Hill Start Aid - except AT models	(HSA)
	Cab Tilt Warning	(CTW)
PASSIVE SAFETY CABIN OCCUPANT SAFETY SYSTEMS (COSS)	Driver & front passenger airbags	
	Driver & front left hand passenger seatbelt pretensioners	
	ECE-R29 cab with side anti-intrusion beams	

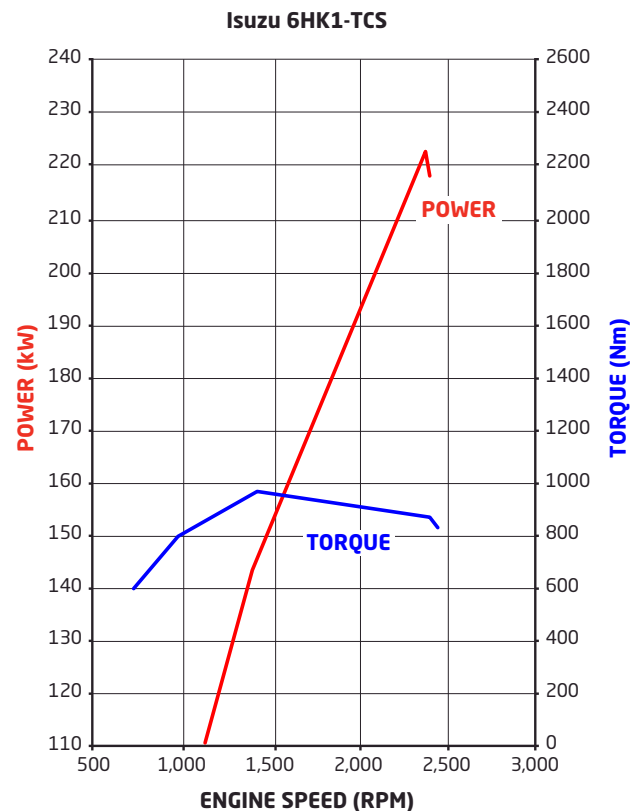

ISUZU WARRANTY COVER

WARRANTY 5 year / 350,000 km Warranty#

TRANSMISSION		
MT	CLUTCH	Type: Single plate with air assisted hydraulic control
		Clutch plate diameter: 381 mm
		Clutch lining area: 1,363 cm ²
	GEARBOX	Description: ZF 9S 1110 T0
Type: 9 speed with synchromesh on gears 1-8		
Ratios:		
Crawler 1st 2nd 3rd 4th 5th 6th 7th 8th Rev 9.48 6.58 4.68 3.48 2.62 1.89 1.35 1.00 0.75 8.97		
Power Take Off facility: Provision at rear of transmission case		
Other features: Repeat 'H' shift pattern		
AT	Description: Allison 3000	
	Type: 6 speed automatic	
	Ratios:	
	1st 2nd 3rd 4th 5th 6th Rev 3.49 1.86 1.41 1.00 0.75 0.65 5.03	
	Power Take Off facility: LHS and top openings on transmission bellhousing. Engine driven PTO drive gear.	
Other features: 5th generation electronic controls with adaptive shift. Long life TranSynd synthetic fluid.		

AXLES	
FRONT	Description: Meritor FG941
	Type: Reverse Elliot I-beam
	Capacity: 6,600 kg
REAR	Description: Meritor RS-23-161G
	Type: Single drive
	Capacity: 10,400kg
	Ratio: MT: 5.625, AT: 6.428

SUSPENSION		
FRONT	Type: Single stage alloy steel taper-leaf springs	
	Other features: Double acting hydraulic shock absorbers. Stabiliser bar.	
REAR	FVR	Type: Multi-leaf main spring, multi leaf helper spring
		Other features: Stabiliser bar.
	FVD	Description: Hendrickson HAS230
		Capacity: 10,400 kg at ground

BRAKES	
DESCRIPTION	Meritor 'Q-Plus'
TYPE	Full air 'S-Cam' front and rear drum brakes
DIAMETER X WIDTH FRONT	419 x 127mm
DIAMETER X WIDTH REAR	419 x 178mm
PARK BRAKE	Spring park brake acting on all rear wheels
AUXILIARY BRAKE	Air controlled exhaust brake

STEERING	
TYPE	Power assisted recirculating ball
GEAR RATIO	22.4:1
TURNS LOCK TO LOCK	5.4
WHEEL LOCK ANGLE	45° (inside wheel) / 35° (outside wheel)

WHEELS & TYRES	
FRONT	Wheels: 22.5 x 8.25 ten stud ISO standard steel wheels
	Tyres: 275/70R22.5 148/145L Michelin X Multi Z Tubeless
	Steer axle tyre rating: 6,300 kg
REAR	Wheels: 22.5 x 8.25 ten stud ISO standard steel wheels
	Tyres: 275/70R22.5 Michelin X Multi D Tubeless
	Drive axle tyre rating: 11,600 kg
Spare: Spare wheel and X Multi Z tyre assembly supplied. Winch type carrier	

CHASSIS FRAME	
TYPE	Cold rivetted ladder frame with parallel side rails.
MATERIAL	MWB / MLWB: HT540A LWB: SAPH440
DIMENSIONS	MWB / MLWB: Side rail (mm): 254 x 85 x 8.0 Rear frame width (mm): 850 LWB: Side rail (mm): 258 x 85 x 10.0 Rear frame width (mm): 850

FUEL TANK	
TYPE	Frame mounted steel fuel tank (except LWB models) Frame mounted aluminium fuel tank (LWB models)
CAPACITY	200L
FUEL CAP	Lockable

ELECTRICAL SYSTEM	
TYPE	24 volt
ALTERNATOR	90 amp
STARTER MOTOR	5.0 kW
BATTERY	2 x 115E41L (651 CCA) batteries connected in series
CAN BUS PROVISION	Underdash CAN system access plug for connection to a Fleet Management System (FMS) (not supplied)

CABIN GENERAL FEATURES	
ENGINE ACCESS	Electro-hydraulic cab tilt
CAB MOUNTING	Rear coil spring suspension with hydraulic shock absorbers
STEPS	heavy duty anti slip steps
DOORS	90° opening internally reinforced front doors
MIRRORS	heated and powered exterior main mirrors with flat glass and additional independantly adjustable convex "spot" mirrors
WIPERS	two speed windscreen wipers with intermittent wipe mode
EXTERIOR LIGHTING	LED main beam and halogen high beam headlamp assembly with position lamp
	Roof mounted clearance lamps
	Front foglamps
AUDIBLE WARNING	Reverse alarm
GRILLE	Body coloured
FRONT BUMPER	Body coloured air dam type
SECURITY	Central locking with remote keyless entry & immobiliser

CABIN INTERIOR	
SEATING	Isri 6860/875 NTS air suspension driver's seat
SEATBELTS	3-point lap sash seatbelts in all outboard seating positions. Driver seatbelt integrated with driver seat. Centre seat lap belts.
STEERING COLUMN	Tilt/telescopic adjustable
ENTRY ASSIST GRIPS	Door & roof pillar mounted
DOOR WINDOWS	Electric control
STORAGE	Overhead compartments
	Twin cup holders
	Centre console box & storage tray
	Front door pockets
POWER OUTLET	24V cigarette lighter
AIRCONDITIONING	Manual control
INTERIOR LIGHTING	Fluorescent lamp
REAR COMPARTMENT	ADR 42 compliant sleeper with mattress

AUDIO VISUAL UNIT	
SCREEN TYPE	6.2" LCD with capacitive touch
OPERATING SYSTEM	Android
RADIO	AM / FM
INTERNAL STORAGE CAPACITY	32GB
OTHER CAPABILITY	Bluetooth features. USB 3.0 socket. Provision for external camera inputs, navigation, reverse sensors, and tyre pressure monitoring.

DRIVER CONTROLS	
SAFETY SYSTEMS	ESC on/off, HSA on/off/sensitivity adjust (except AT models)
ENGINE	Idle speed control
	Cruise control
	DPD manual regeneration switch
TRANSMISSION (AT ONLY)	Pushbutton gear selection control
GENERAL CONTROLS	Headlamp on/off and levelling, windscreen wipers (2 speed and intermittent modes), washers, exhaust brake, turn signals

INSTRUMENTATION	
MULTI INFORMATION DISPLAY	CTW indicator
	Vehicle systems status
	Low fuel level alert
	Fuel consumption information
	Service interval alerts
	Hourmeter
GENERAL INSTRUMENTATION	Adjustable vehicle speed warning
	Speedometer & tachometer
	Digital odometer with integrated dual tripmeters
	Engine coolant temperature, fuel level and air pressure guages


FVR 1000/950 4X2 FVD 1000/950 4X2

ISUZU TRUCKS

WEIGHTS (kg)							
MODELS	RATINGS*		LOADING LIMIT* (at ground)		CAB CHASSIS WEIGHT #		
	GVM	GCM***	FRONT	REAR	FRONT	REAR	TOTAL
FVR 1000M	16,500	20,000	6,000	8,200	3,235	2,035	5,270
FVR 950M	12,000	15,500	6,000	8,200	3,235	2,035	5,270
FVD 1000 AUTO	16,500	20,000	6,000	8,200	3,490	1,885	5,375
FVD 950 AUTO	12,000	15,500	6,000	8,200	3,490	1,885	5,375

* Vehicle ratings and front and rear mass limits are subject to regulatory requirements - Consult your dealer to select a specific vehicle to suit your requirements. ** Chassis cab as supplied from the factory including 10 litres of fuel *** Max towed mass 3,500Kg.

DIMENSIONS (mm)													
MODELS	WB	OAL	FOH	ROH	EA	CE	RT	ORT	CH	FFA (unladen)	RFA (unladen)	RFH (unladen)	TURNINGCIRCLE KERB TO KERB (m)
FVR 1000/950 M	4,250	7,405	1,440	1,715	3,550	5,340	1,840	2,445	2,850	1,000	1,085	1,110	14.8
FVD 1000/950 AUTO	5,550	9,255	1,440	2,265	4,850	7,190	1,840	2,445	2,850	1,000	1,010	1,010	19.4

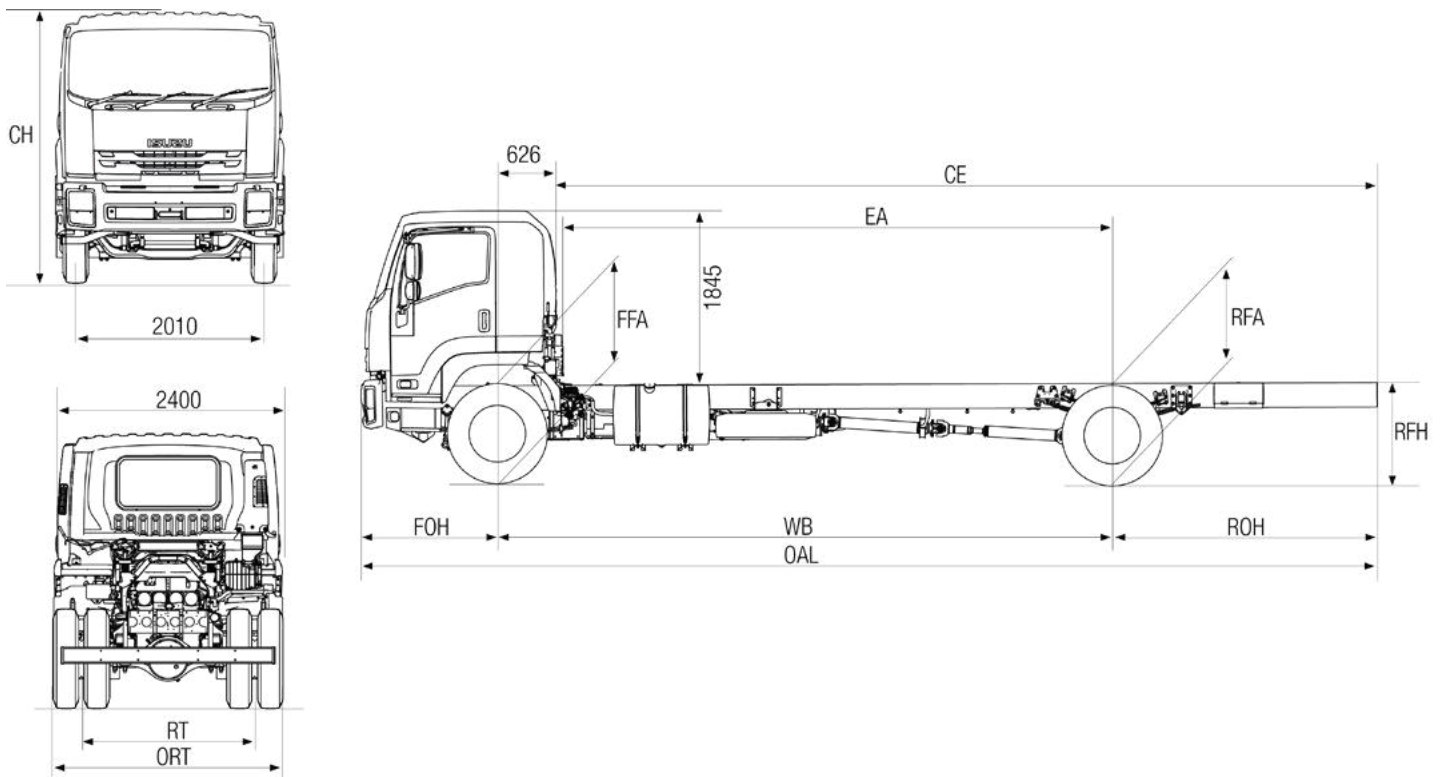

PERFORMANCE (calculated - typical paved road)				
		GEARED SPEED~ (top gear at peak power engine rpm)	LOW SPEED GRADEABILITY (lowest forward gear assuming no wheel slip)	ENGINE SPEED (top gear at 90 km/h)
FVR950M	at 12,000 kg GVM	101 km/h @ 2400 rpm	85%	2,139 rpm
FVD9500 AUTO	at 12,000 kg GVM	102 km/h @ 2400 rpm	67%	2,118 rpm
FVR/FVD 1000	at 16,500 kg GVM	101 km/h @ 2,400 rpm	62%	2,139 rpm
FVR/FVD 1000 AUTO	at 16,500 kg GVM	102 km/h @ 2,400 rpm	49%	2,118 rpm

* Maximum speed achievable depends on vehicle frontal area as well as other factors. Consult your Isuzu dealer for more detailed information. Vehicle is speed limited to 100km/h.

ORDER CODES	
MODELS	CODES
FVR 1000M	FV0116
FVR 950M	FV0816
FVD 1000 AUTO	FV0216
FVD 950 AUTO	FV0916

#Total 5 Year Warranty, including Base Warranty (36 months / 200,000kms) and Additional Warranty (24 months / 150,000kms), cover is 60 months or 350,000kms, whichever comes first. To qualify for Additional Warranty, all scheduled servicing during the Base and Additional Warranty periods (ie. the total 60 months) must be performed by an authorised Isuzu service dealer from the date of delivery to the first customer. If scheduled servicing is performed by unauthorized service providers, only the Base Warranty will apply. Tipper bodies are excluded from Additional Warranty. These are covered by Base Warranty only.

The information in this spec sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. Isuzu New Zealand (INZ) may make changes at any time without notice, in prices, colours, materials, equipment and models. INZ makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spec sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, INZ is not liable to any person as result of reliance on the content of this spec sheet.