



All images displayed in this document are for illustrative purposes only.

## Specification Guide

# NMS 60.15

### Weight Rating

|            |                     |
|------------|---------------------|
| <b>GVM</b> | 5,995 kg            |
| <b>GCM</b> | 8,000 kg - 9,500 kg |

### Engine

|               |                            |
|---------------|----------------------------|
| <b>Power</b>  | 110 kW @ 2,450 rpm         |
| <b>Torque</b> | 430 Nm @ 1,400 - 2,450 rpm |

### Transmission

|                                       |
|---------------------------------------|
| 6 speed manual transmission (MT)      |
| 9 speed dual clutch transmission (DT) |

### Wheelbase

|          |
|----------|
| 2,490 mm |
| 3,360 mm |

### Key Features

- ADR 80/04 (pPNLT) Compliant
- Advanced Emergency Braking (AEB)
- Bi-LED Headlamps with Daytime Running Lamps
- ECE-R29 cab with side anti-intrusion beams
- Electronic Stability Control (ESC)
- Lane Departure Warning (LDW)
- Full Speed Adaptive Cruise Control (FACC)\*\*
- Electronic Park Brake (EPB) with Auto Brake Hold

\*\* Dual Clutch transmission only



### Truck Finder

Scan to search, view and download full spec sheets for all Isuzu truck models.


**ISUZU**  
TRUCKS

# Driveline

## Engine

|                          |                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Description</b>       | Isuzu 4JZ1-TCS                                                                                              |
| <b>Type</b>              | 4 cylinder                                                                                                  |
| <b>Power</b>             | 110 kW (150PS) @ 2,450 rpm                                                                                  |
| <b>Torque</b>            | 430 Nm @ 1,400 - 2,450 rpm                                                                                  |
| <b>Displacement</b>      | 2,999 cc                                                                                                    |
| <b>Bore x Stroke</b>     | 95.4 mm x 104.9 mm                                                                                          |
| <b>Induction</b>         | Electronically controlled variable nozzle turbocharger with air-to air intercooler.                         |
| <b>Fuel Injection</b>    | Direct injection high pressure common rail system                                                           |
| <b>Emission Standard</b> | ADR 80/04 (pPNLT) compliant                                                                                 |
| <b>Emission Control</b>  | SCR (Selective Catalytic Reduction)<br>DPD (Diesel Particulate Diffuser)<br>EGR (Exhaust Gas Recirculation) |
| <b>Auxiliary Brake</b>   | Vacuum controlled exhaust brake                                                                             |

## 4JZ1-TCS 150PS pPNLT

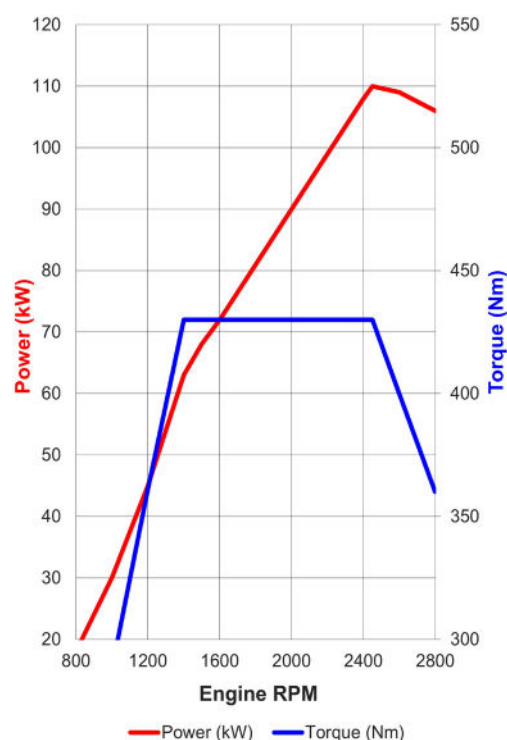

## Transmission

|                                                                                           |                                                                                                        |      |      |      |      |      |      |      |      |      |
|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|
| MT                                                                                        | Description: ISUZU MYY-5S                                                                              |      |      |      |      |      |      |      |      |      |
|                                                                                           | Type: 5 speed manual with synchromesh on gears 1 - 5                                                   |      |      |      |      |      |      |      |      |      |
|                                                                                           | Ratios:                                                                                                |      |      |      |      |      |      |      |      |      |
|                                                                                           | 1                                                                                                      | 2    | 3    | 4    | 5    | REV  |      |      |      |      |
|                                                                                           | 5.97                                                                                                   | 3.43 | 1.75 | 1.00 | 0.79 | 5.70 |      |      |      |      |
| Power Take Off Facility: Provision on LHS of transmission case. Drive from counter gear.  |                                                                                                        |      |      |      |      |      |      |      |      |      |
| DT                                                                                        | Description: ISUZU MYR-9R                                                                              |      |      |      |      |      |      |      |      |      |
|                                                                                           | Type: 9 speed dual clutch transmission with both fully automatic and clutchless manual operation modes |      |      |      |      |      |      |      |      |      |
|                                                                                           | Ratios:                                                                                                |      |      |      |      |      |      |      |      |      |
|                                                                                           | 1                                                                                                      | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | REV  |
|                                                                                           | 5.16                                                                                                   | 3.94 | 2.91 | 2.22 | 1.70 | 1.30 | 1.00 | 0.76 | 0.58 | 4.81 |
| Power Take Off Facility: Provision on LHS of transmission case. Driven from counter gear. |                                                                                                        |      |      |      |      |      |      |      |      |      |
| Gearbox Transfer                                                                          | Type: On demand part time all wheel drive controlled by viscous coupling                               |      |      |      |      |      |      |      |      |      |
|                                                                                           | Ratio: 1.000                                                                                           |      |      |      |      |      |      |      |      |      |

## Clutch

|           |                                                                                |
|-----------|--------------------------------------------------------------------------------|
| <b>MT</b> | Type: Single plate with auto adjusting hydraulic control and vacuum assistance |
| <b>DT</b> | Type: Fully automated dual wet clutch and torque converter (TC) with lock up   |

# Technology & Equipment

## Intelligent Safety

### ACTIVE SAFETY

### ADVANCED DRIVER ASSISTANCE SYSTEMS (ADAS)^

|                                             |
|---------------------------------------------|
| Advanced Emergency Braking (AEB)            |
| Anti Lock Braking System (ABS)              |
| Anti Skid Regulator (ASR)                   |
| Attention Alert System (AAS)                |
| Auto Lighting System (ALS)                  |
| Distance Warning System (DWS)               |
| Electronic Stability Control (ESC)          |
| Electronic Park Brake (EPB)                 |
| Electronic Brakeforce Distribution (EBD)    |
| Full Speed Adaptive Cruise Control (FACC)** |
| Intelligent Speed Limiter (ISL)             |
| Intersection Emergency Braking (IEB)        |
| Intersection Warning System (IWS)           |
| Lane Departure Warning (LDW)                |
| Miss Acceleration Mitigation (MAM)**        |
| Traffic Movement Warning (TMW)              |
| Traffic Sign Recognition (TSR)**            |

### PASSIVE SAFETY

### CABIN OCCUPANT SAFETY SYSTEMS (COSS)

|                                                             |
|-------------------------------------------------------------|
| Driver and Front Left Hand Passenger Seatbelt Pretensioners |
| Driver and Front Passenger Airbags                          |
| ECE-R29 Cab with Side Anti-Intrusion Beams                  |
| Door mounted cornering lamps                                |
| Overhead shelf restraint netting                            |

\*\*Available with DT only

## Accessories

### Protection

|                        |   |
|------------------------|---|
| Isuzu Genuine Bull Bar | ● |
| Isuzu Seat Covers      | ● |
| Isuzu Floor Mats       | ● |
| Isuzu Dash Mats        | ● |
| Isuzu Mudflaps         | ● |

### Technology

|               |   |
|---------------|---|
| Isuzu Cameras | ● |
|---------------|---|

### Aerodynamics

|                |   |
|----------------|---|
| Air Deflectors | ● |
|----------------|---|

### Safety

|                      |   |
|----------------------|---|
| Warning Triangles    | ● |
| Wheel Nut Indicators | ● |
| Signage              | ● |

- Fitted as Standard      ● Option to Fit

Some options are provided via 3rd party retailer. Please discuss with your local Isuzu dealer.

# Cabin Features

## General Features

|                          |                                                                                |
|--------------------------|--------------------------------------------------------------------------------|
| <b>Audible Warning</b>   | Reverse alarm                                                                  |
| <b>Engine Access</b>     | Manual cab tilt to 45° with torsion bar assistance                             |
| <b>Steps</b>             | Heavy duty anti slip steps                                                     |
| <b>Mirrors</b>           | Pillar mounted heated mirrors with electric folding (manual mirror adjustment) |
| <b>Wipers</b>            | Two speed windscreen wipers with intermittent wipe mode                        |
| <b>Exterior Lighting</b> | BI-LED Headlamps with LED Daytime Running Lamps (DRL)<br>LED tail lamps        |
| <b>Front Bumper</b>      | 3-piece resin, body coloured                                                   |
| <b>Security</b>          | Remote central locking and immobiliser                                         |

## Premium Isuzu Audio Visual Unit

|                                |                                                                      |
|--------------------------------|----------------------------------------------------------------------|
| <b>Connectivity</b>            | Bluetooth                                                            |
|                                | USB socket                                                           |
|                                | WiFi with over-the-air updates                                       |
|                                | Input for up to 6 High Definition (HD) cameras (available accessory) |
| <b>Radio</b>                   | AM / FM                                                              |
| <b>Screen Type</b>             | 8" High Definition with capacitive touch                             |
| <b>Smartphone Integration*</b> | Wireless Apple CarPlay®                                              |
|                                | Wireless Android Auto™                                               |
|                                | Wi-Fi connectivity                                                   |
| <b>Navigation</b>              | Provided via smartphone application                                  |

CarPlay is a trademark of Apple Inc.  
Android Auto is a trademark of Google LLC.



## Cabin Interior

|                           |                                                                                      |
|---------------------------|--------------------------------------------------------------------------------------|
| <b>Air Conditioning</b>   | Auto climate control                                                                 |
| <b>Door Windows</b>       | Electric control                                                                     |
| <b>Entry Assist Grips</b> | Door and roof pillar mounted                                                         |
| <b>Interior Lighting</b>  | LED lamp                                                                             |
| <b>Power Outlet</b>       | 24V cigarette lighter                                                                |
| <b>Seatbelts</b>          | 3-point lap sash seatbelts in all outboard seating positions. Centre seat lap belts. |
| <b>Seating</b>            | Driver's bucket seat                                                                 |
|                           | Passenger benchseat with 2 seat capacity                                             |
| <b>Steering Column</b>    | Tilt / telescopic adjustable                                                         |
| <b>Storage</b>            | Overhead cabinet, two cup holders, door pockets                                      |

## Driver Control

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Engine</b>                  | Full speed adaptive cruise control**                                                                                            |
|                                | DPD manual regeneration switch                                                                                                  |
|                                | Idle speed control                                                                                                              |
| <b>General Controls</b>        | Windscreen wipers (2 speed and intermittent modes), washers, exhaust brake, turn signals                                        |
| <b>Safety Systems</b>          | AEB on/off, DWS on/off/sensitivity adjust, LDW on/off/sensitivity adjust, TMW on/off, ESC&ASR on off, headlamps and ALS on/off. |
| <b>Steering Wheel Controls</b> | Multi Information Display controls                                                                                              |
|                                | Audio Visual volume control                                                                                                     |
|                                | Audio Visual seek controls                                                                                                      |
|                                | Phone control                                                                                                                   |
|                                | ADAS controls                                                                                                                   |
| <b>Transmission (DT Only)</b>  | Gear selection control with P-R-N-D and sequential shift positions                                                              |

\*\*Available with DT only

## Instrumentation

|                                  |                                                   |
|----------------------------------|---------------------------------------------------|
| <b>General Instrumentation</b>   | Digital odometer with integrated dual tripmeters  |
|                                  | Engine coolant temperature and fuel level gauges  |
|                                  | Speedometer and tachometer                        |
| <b>Multi Information Display</b> | Adjustable vehicle speed warning                  |
|                                  | AEB, FCW, DWS, LDW, TMW systems activation alerts |
|                                  | CTW indicator                                     |
|                                  | Hourmeter                                         |
|                                  | Vehicle systems status                            |
|                                  |                                                   |

# Chassis

## Steering

|                    |                                |
|--------------------|--------------------------------|
| Type               | Power assisted rack and pinion |
| Turns Lock To Lock | 5                              |
| Lock Angle Inside  | 35 °                           |
| Lock Angle Outside | 33 °                           |

## Suspension

|       |                                                         |
|-------|---------------------------------------------------------|
| Front | Type: Torsion bar springs                               |
|       | Other Features: Double acting hydraulic shock absorbers |
| Rear  | Type: Multi leaf main spring, taper leaf helper spring  |
|       | Other Features: Double acting hydraulic shock absorbers |

## Fuel Tank

|              |                                                    |
|--------------|----------------------------------------------------|
| Diesel Tank  | Type: Frame mounted tank                           |
|              | Maximum capacity <sup>2</sup> : 100L               |
|              | Fuel cap: Lockable cap                             |
| AdBlue® Tank | Type: Frame mounted high-density polyethylene tank |
|              | Maximum capacity <sup>2</sup> : 14 L               |

## Electrical Systems

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Type              | 24 volt                                            |
| Alternator        | 90 amp                                             |
| Battery           | 2 x 80D26L (600 CCA) batteries connected in series |
| CAN Bus provision | FMS Provision                                      |

## Chassis Frame

|            |                                                              |
|------------|--------------------------------------------------------------|
| Type       | Cold rivetted ladder frame                                   |
| Material   | JSH440 steel                                                 |
| Dimensions | Side rail (mm): 65 x 180 x 5.3<br>Rear frame width (mm): 700 |

## Axles

|       |                                                                                       |
|-------|---------------------------------------------------------------------------------------|
| Front | Description: Isuzu FD026                                                              |
|       | Type: Fully independent wishbone and final drive with Birfield inner and outer joints |
|       | Capacity: 2,600 kg                                                                    |
| Rear  | Description: Isuzu R050                                                               |
|       | Type: Full floating banjo with four differential pinions                              |
|       | Capacity: 5,000 kg                                                                    |
|       | Ratio: 4.777                                                                          |

## Wheels & Tyres

|       |                                          |
|-------|------------------------------------------|
| Front | Wheels: 16 x 5.5J five stud steel wheels |
|       | Tyres: 205/85R16 117/115L                |
|       | Steer axle tyre rating: 2,570 kg         |
| Rear  | Wheels: 16 x 5.5J five stud steel wheels |
|       | Tyres: 205/85R16 117/115L                |
|       | Rear axle tyre rating: 4,860 kg          |
| Spare | Wheel: 16 x 5.5J five stud steel wheel   |
|       | Tyre: 205/85R16 117/115L                 |

## Brakes

|                |                                                                                       |
|----------------|---------------------------------------------------------------------------------------|
| Type           | Ventilated disc/disc with dual circuit hydraulic control, and integrated boost assist |
| Diameter Front | 293 mm                                                                                |
| Diameter Rear  | 293 mm                                                                                |
| Park Brake     | Electric Park Brake (EPB), drum mounted on rear of transmission                       |


# Weights & Dimensions

## Weights (kg)

| Models                      | Ratings <sup>3</sup> |       | Loading Limit <sup>3</sup><br>(at ground) |       | Cab Chassis Weight <sup>4</sup> |      |       | Model Code |
|-----------------------------|----------------------|-------|-------------------------------------------|-------|---------------------------------|------|-------|------------|
|                             | GVM                  | GCM   | Front                                     | Rear  | Front                           | Rear | Total |            |
| <b>NMS 60.15 MT D34 4X4</b> | 5,995                | 9,500 | 2,570                                     | 4,860 | 1,780                           | 760  | 2,540 | NM2608     |
| <b>NMS 60.15 DT D34 4X4</b> | 5,995                | 8,000 | 2,570                                     | 4,860 | 1,810                           | 780  | 2,590 | NM2609     |
| <b>NMS 60.15 DT C34 4X4</b> | 5,995                | 8,000 | 2,570                                     | 4,860 | 1,999                           | 807  | 2,806 | NM2610     |

## Dimensions (mm)

| Models                         | WB    | OAL   | FOH   | ROH   | CA    | RT    | ORT   | CH    | FFH<br>(Unladen) | RFH<br>(Unladen) | EFH<br>(Unladen) | Turning Circle<br>Kerb to Kerb<br>(m) <sup>5</sup> |
|--------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------------------|------------------|------------------|----------------------------------------------------|
| <b>NMS 60.15 MT/DT D34 4X4</b> | 3,360 | 6,025 | 1,100 | 1,565 | 2,699 | 1,425 | 1,865 | 2,205 | 672              | 730              | 759              | 12.34                                              |
| <b>NMS 60.15 DT C34 4X4</b>    | 3,360 | 6,030 | 1,100 | 1,570 | 1,702 | 1,425 | 1,865 | 2,195 | 662              | 727              | 757              | 12.34                                              |

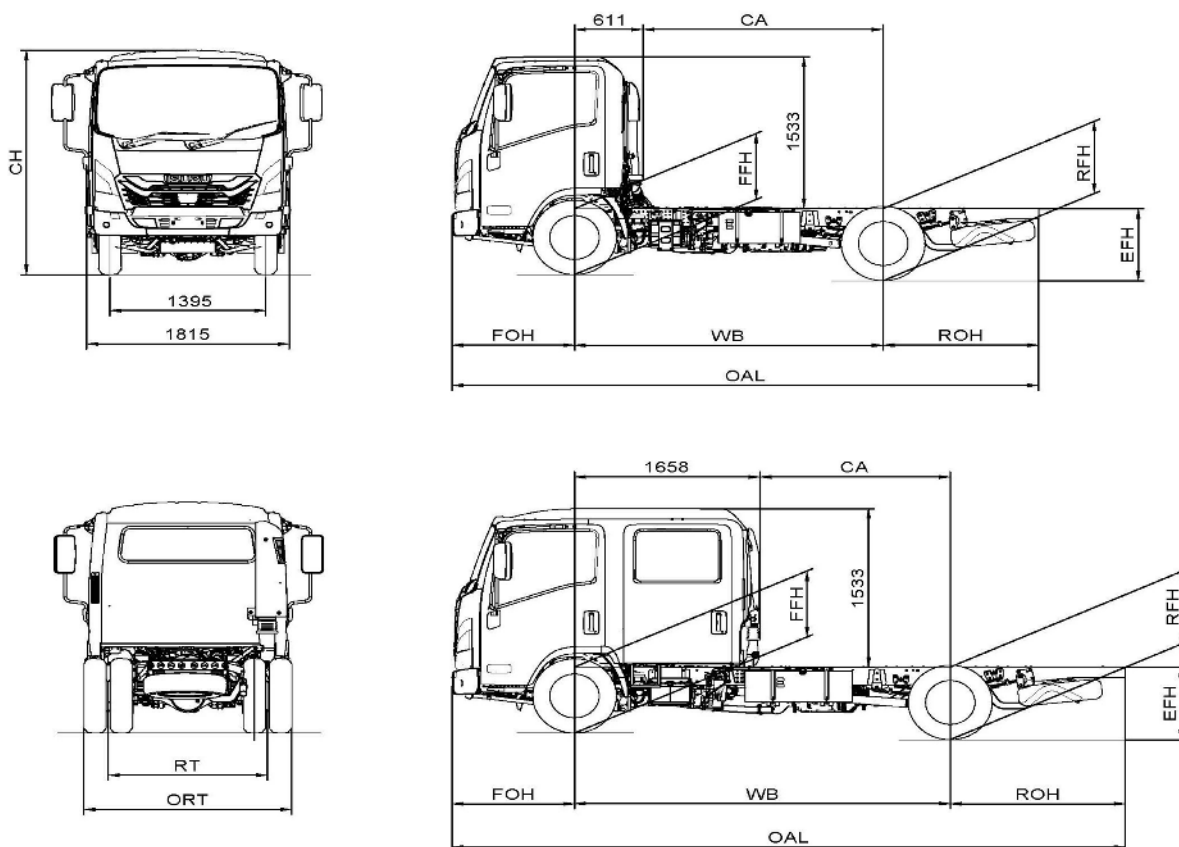

# Service & Support



## Dealer Network

### Service & Support

National Isuzu Truck Dealer Network  
and Accredited Service Centres

[Find a Dealer Online](#)

Find your local dealer

Scan QR Code



## Warranty<sup>#</sup>

### Chassis

3 Year Warranty<sup>#</sup>

100,000 km<sup>#</sup>

### Genuine Parts & Accessories

2 Year Warranty or 50,000km<sup>#</sup>

(When installed by an Isuzu Trucks  
Approved Dealership - Including Labor)



<sup>#</sup> 3 Year Warranty (36 months / 100,000kms) cover is 36 months or 100,000kms, whichever comes.

<sup>2</sup> As shown on fuel tank. Volume of fuel that can be added to a near-empty tank will vary according to operating conditions.

<sup>3</sup> Vehicle ratings and axle weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application.

<sup>4</sup> Cab chassis only as supplied including 90% fuel and tools/spare wheel (if applicable).

<sup>5</sup> Turning circle dimensions are based on manufacturers calculations and may vary under real-world conditions.

The information in this spec sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. Isuzu New Zealand (INZ) may make changes at any time without notice, in prices, colours, materials, equipment and models. INZ makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spec sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, INZ is not liable to any person as result of reliance on the content of this spec sheet.

<sup>^</sup>Advance Driver Assistance Systems are intended to support the driver but are not a replacement for safe driving practices.

\*Smartphone Integration compatible with selected apps and the latest smartphone versions of iOS and Android.Active data service is required for some functionality. For USB connections, a connection cable is sold separately.

